


Vertical Dual Row Surface Mount Plastic Shell (Style 26) Connector

Winchester Interconnect Micro offers PCB Vertical Dual Row Surface Mount Plastic Shell (Style 26) Connectors, designed to deliver dependable performance and easy integration in a variety of PCB applications. These connectors feature a 1-piece contact design and a rectangular flat tail that ensures superior soldering results with no lead deformation during assembly. Built for durability and consistent performance, they operate reliably across a -55°C to 125°C temperature range, with high-temperature versions available up to 200°C (add HT) for more demanding environments. Available in 9 to 65 contacts, these connectors are ideal for compact, high-density board layouts.



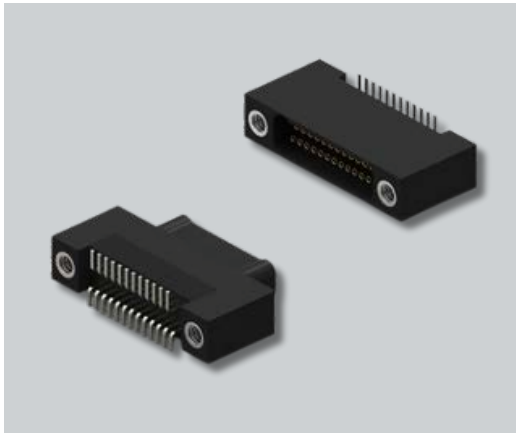


KEY FEATURES & BENEFITS



- Durable Plastic Shell Design – Lightweight and reliable for diverse PCB applications.
- Rectangular Flat Tail Configuration – Ensures distortion-free soldering and precise board mounting.
- Wide Temperature Range – Operates from -55°C to 125°C ; HT versions extend to 200°C .
- High-Quality Materials –
 - Signal Pin & Socket Contacts: C17410 Beryllium Copper Contact Plating: Gold plating per ASTM
 - B488 PC Tails: C17410 Beryllium Copper per ASTM
 - B768 PC Tail Plating: 60/40 Tin/Lead per SAE-
 - AMS-P- 81728 or Gold per ASTM B488
- Available in 9 to 65 Contacts – Suitable for multiple configurations and high-density designs.
- Ideal for Compact and Precision PCB Applications – Perfect for use in aerospace, defense, and instrumentation systems requiring reliable Nano-D connectivity.

Nano PCB Vertical Dual Row Surface Mount Plastic Shell (Style 26)



DIMENSIONAL

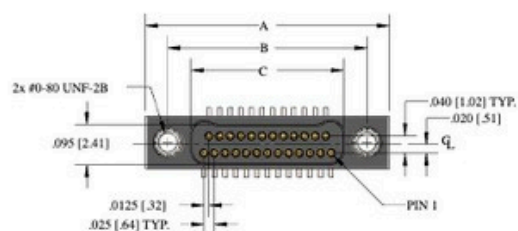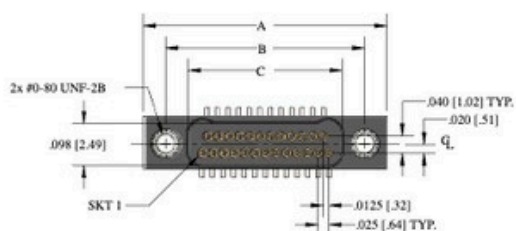

RECEPTACLE (SOCKETS)

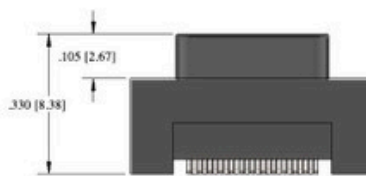

PLUG (PINS)

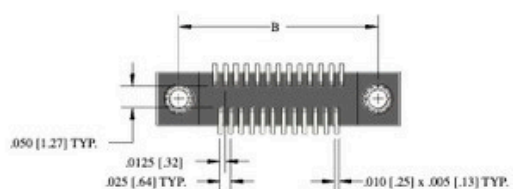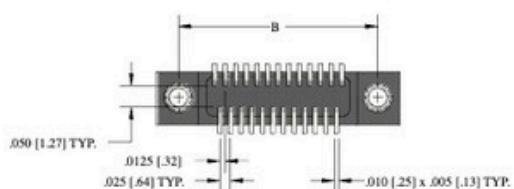

Size	A	B	C		D
			Receptacle	Plug	
9	.375 [9.52]	.270 [6.86]	.160 [4.06]	.163 [4.14]	.175 [4.44]
15	.450 [11.43]	.345 [8.76]	.235 [5.97]	.238 [6.04]	.250 [6.35]
21	.525 [13.33]	.420 [10.67]	.310 [7.87]	.313 [7.95]	.325 [8.25]
25	.575 [14.60]	.470 [11.94]	.360 [9.14]	.363 [9.22]	.375 [9.52]
31	.650 [16.51]	.545 [13.84]	.435 [11.05]	.438 [11.12]	.450 [11.43]
37	.725 [18.41]	.620 [15.75]	.510 [12.95]	.513 [13.03]	.525 [13.33]
51	.900 [22.86]	.795 [20.19]	.685 [17.40]	.688 [17.47]	.700 [17.78]
65	1.075 [27.30]	.970 [24.64]	.860 [21.84]	.863 [21.92]	.875 [22.22]

Nano PCB Vertical Dual Row Surface Mount Plastic Shell (Style 26)

PERFORMANCE

Electrical Properties	
Contact Resistance	33 milliohm max contact only and 87 milliohms max with 6" wire @ 1A
Current Rating	1A max.
Dielectric WithStanding Voltage	250 VAC at sea level, 100 VAC at 70,000 feet. 1mA leakage current max.
Insulation Resistance	100 VDC and 5000 Megohms min.

Mechanical	
Engaging Force	5 oz max.
Separation Force	.4 oz min.
Mating/Unmating Force	7 oz x # of contacts max.
Vibration	EIA-364-28 Condition IV, 1 microsecond max discontinuity
Shock	EIA-364-27 Condition G, 1 microsecond max discontinuity
Durability	EIA-364-09, 200 matings, passes Mating Force, CR, Eng and Sep Forces

Nano PCB Vertical Dual Row Surface Mount Plastic Shell (Style 26)

MATERIALS

Materials and Finishes	
Signal Pin Contacts	C17410 Beryllium Copper per ASTM B768
Signal Socket Contacts	C17410 Beryllium Copper per ASTM B768
Contact Plating	Gold Plating per ASTM B488
PC Tails	C17410 Beryllium Copper per ASTM B768
PC Tail Plating	60/40 Tin/Lead plating per SAE-AMS-P-81728, or Gold plating per ASTM B488
Shell	6061-T6 Aluminum per SAE-AMS-QQ-A200/8 or 300 Series Stainless Steel per ASTM A582
Shell Plating	Electroless Nickel per SAE-AMS2404, or Cadmium per SAE-AMS-QQ-P-416 or Black Anodize per MIL-A-8625 or Passivated per AMS2700
Insulator Material	LCP(Liquid Crystal Polymer) GLCP-30F or PPS per MIL-M-24519 GST-40F
Hardware	300 Series Stainless Steel per ASTM A 582/A582 or ASTM A 581/A581M, Passivated per SAE AMS-2700

Nano PCB Vertical Dual Row Surface Mount Plastic Shell (Style 26)

HOW TO ORDER

Nano Circuit Series Engineering Number Definitions

Nano Circuit Series	CN	M	6	L	25	-	2	P	07	1	-	0.140	-	S01	-	HT	-	1	SPL
Shell Material																			
M = Metal Shell																			
P = Plastic Shell																			
Termination Style																			
4 = Flex Circuit																			
6 = Vertical PC tails																			
8 = Right Angle PC Tails																			
26 = Vertical SMT																			
28 = Right Angle SMT																			
36 = Low Profile Vertical SMT (Male Only)																			
38 = Extended Profile RA SMT (Female Only)																			
Insulator Material																			
L = LCP																			
Size (No. of Contacts)																			
09, 15, 21, 25, 31, 37, 51, 65, & 69																			
Insulator Type																			
1 = Single Row (Up to size 51)																			
2 = Dual Row																			
Contact Type																			
P = Pin, Integral Flat Tail																			
S = Socket, Integral Flat Tail																			
Mating Hardware																			
0 = No Hardware																			
01 = Phillips Head Jackscrews																			
02 = Hex Head Jackscrews																			
03 = Thumb Jackscrew																			
05 = Slotted Head Jackscrews																			
06 = Floating Phillips Head Jackscrews (Female Only)																			
07 = Threaded Hole																			
08 = Floating (Retractable) Hex Head Jackscrews (Female Only)																			
09 = Floating (Retractable) Slotted Head Jackscrews (Female Only)																			
Special designator - SPL																			
SPL is to be added to the end of the part number if the connector cannot be fully defined by the rest of the engineering number																			
PCB Mounting Options (Style 8, 28, & 38 Only)																			
Blank = Threaded Mounting Holes																			
1 = Alignment Posts with Threaded Mounting Holes																			
2 = Clearance Mounting Holes																			
3 = Alignment Posts with Clearance Mounting Holes																			
4 = Solder Posts (Style 6, 8, 26, 28, 36, & 38)																			
Temperature Rating (Omit for standard Temp, 125°C)																			
Blank = 125°C																			
HT = 200°C																			
LO = 4 Kelvin																			
Shell Plating or Material (Omit for plastic shell or cadmium plating)																			
Blank = Cadmium																			
S01 = Electroless Nickel																			
S02 = Chem Film																			
S03 = Black Anodized																			
S04 = Gold																			
S05 = Titanium																			
S06 = Olive-Drab Cadmium																			
S07 = Black Nickel																			
S08 = Nickel-PTFE																			
S09 = Stainless Steel, Passivated																			
S10 = Zinc Nickel																			
Lead Length (Style 6 and 8 Only)																			
Blank = 0.109																			
Other Lengths = 0.140 & 0.172																			
(Consult Factory for Additional Lengths)																			
Board Thickness (Style 4 Only)																			
Blank = .010																			
Other Panel Thicknesses 0.030 & 0.054																			
(Consult Factory for Additional Thicknesses)																			
Lead Plating																			
1 = Tin/Lead (minimum 3% Lead) plated (Not RoHS Compliant) (Not Available with high temp (HT) connectors)																			
2 = Gold Plated (RoHS Compliant)																			